

810G-5PI

工業級 5 埠 GbE 非網管型 PoE 交換器

產品介紹

昇頻工業級5埠GbE非網管型PoE交換器810G-5PI具備4個PoE埠(乙太網路供電), 強固纖巧Slim設計, 為工業網絡邊緣應用提供5個GbE埠和即插即用的優勢。

昇頻工業級GbE PoE交換器810G-5PI為嚴峻環境中提供一個理想的電源和可靠的GbE傳輸速度解決方案。昇頻810G-5PI可支援4個受電端設備(Powered Device), 不受電源插座限制。

工業級GbE PoE交換器810G-5PI可以滿足每個LAN埠具足夠PoE功率輸出的需求, 最高可達

30W, 符合IEEE 802.3at 標準的上限, 使用者可以靈活地連接電動變焦的 IP 攝影機, 或大多數Wi-Fi 5、Wi-Fi 6 存取接入點的裝置。




產品特色

- 全 GbE 乙太網路連接埠支援銅纜介面。
- 適合在嚴峻環境中運作的工規強固纖巧 Slim 設計。
- 6KV 突波保護器於 RJ45 端口。
- 總 PoE 功率預算 120W。
- 支援 Jumbo frames。
- 支援 DIN 導軌安裝。
- 支援 redundant power input。

產品規格

| | |
|--|---|
| <p>Interfaces</p> <ul style="list-style-type: none"> ■ LAN port: 10/100/1000BASE-T x 5, RJ45 ■ 4-pin DC IN power terminal block <p>Standards Compliance</p> <ul style="list-style-type: none"> ■ IEEE 802.3 ■ IEEE 802.3u ■ IEEE 802.3ab ■ IEEE 802.3af/at <p>Flow Control</p> <ul style="list-style-type: none"> ■ Support IEEE 802.3x Flow Control ■ Support Pause Frame at Full-Duplex operation ■ Support backpressure at Half-Duplex operation <p>Mechanical</p> <ul style="list-style-type: none"> ■ Dimension (W x H x D): 28 x 99 x 90 mm ■ Weight: TBD g ■ DIN-rail design ■ IP40 <p>Power</p> <ul style="list-style-type: none"> ■ Dual power input ■ Overload Current protection ■ 48 ~ 57 VDC ■ PoE power budget: 120W | <p>LED Indicators</p> <ul style="list-style-type: none"> ■ Power input ■ ALM LED ■ Ethernet LAN port status ■ PoE output ■ Uplink port status <p>Environment & Regulatory Compliance</p> <ul style="list-style-type: none"> ■ Operation temperature: -40 to +75°C ■ Storage temperature: -40 to +85 °C ■ Humidity (non-condensing): 10 to 95% ■ EMC Class A ■ Emission (EMI/EMS): CE/FCC class A, ■ EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8 ■ Safety: ETL EN62368 ■ Shock: IEC60068-2-27 ■ Freefall: IEC60068-2-31 ■ Vibration: IEC60068-2-6 ■ MTBF: > 25 years @25°C |
|--|---|

產品尺寸

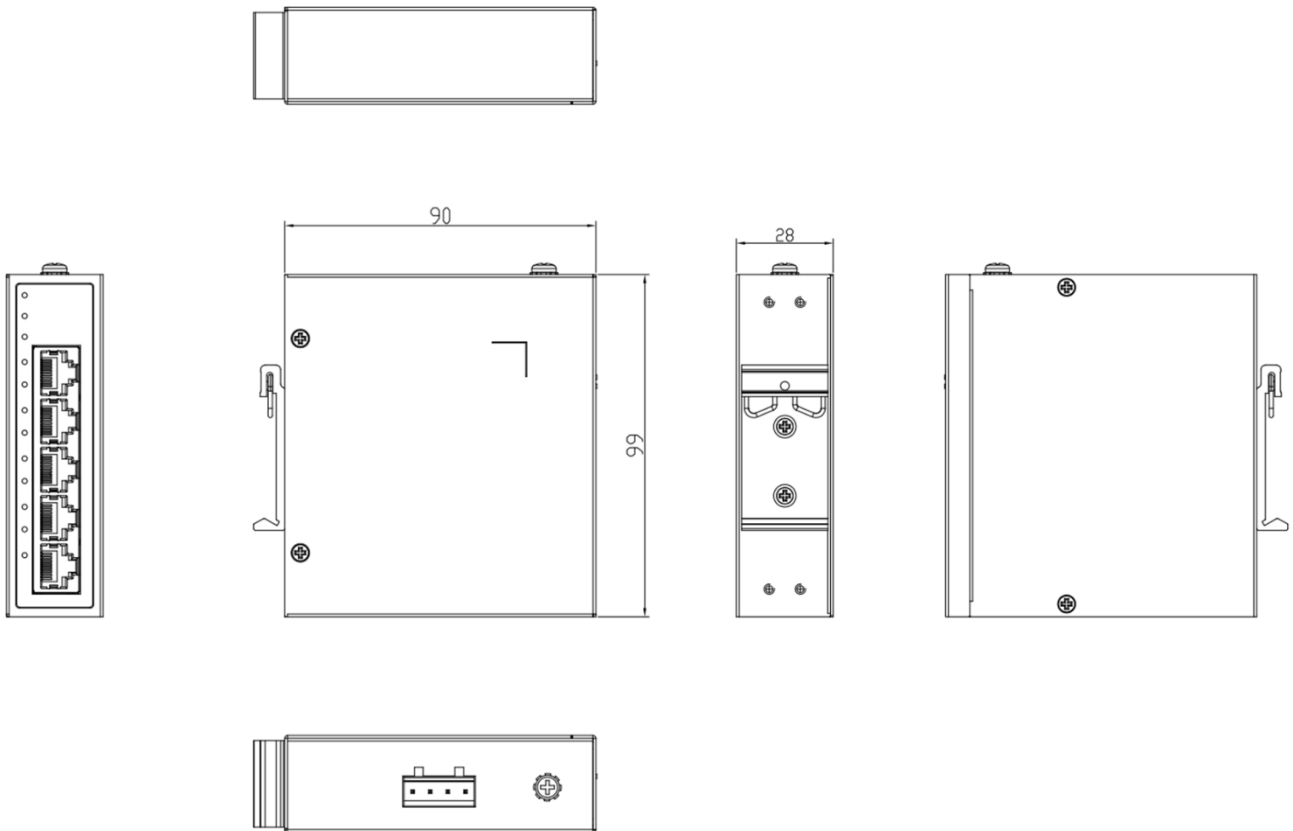

訂購資訊

| 型號 | 產品描述 |
|----------|--------------------------|
| 810G-5PI | 工業級 5 埠 GbE 非網管型 PoE 交換器 |

註: 產品特色和規格如有更改, 恕不另行通知。