

850G-10

10 埠 GbE 網管型交換器



產品介紹

昇頻 10 埠 GbE 網管型交換器 850G-10 是一款商規 10 埠網管型乙太網路交換器，適用於 SMB、辦公室、建築系統、IP 監控與一般企業邊緣網路。其配備 8 埠 GbE RJ45 連接埠與 2 埠 GbE SFP 上行埠，可提供穩定的 Gigabit 銅纜接取與彈性光纖上行擴充，適合需要可靠資料傳輸、實用網路擴充，以及網管 Layer 2 交換功能的商規部署。

透過 SFP 光纖上行與 VLAN、QoS、STP/RSTP/MSTP、Link Aggregation、IGMP/MLD Snooping 及 SNMP 監控等 Layer 2 管理功能，交換器可協助提升網路可用性、流量控管與日常維運效率。其實用的商規部署價值，適合辦公室網路、建築系統、IP 監控骨幹與 SMB 邊緣網路，滿足客戶對銅纜與光纖連接、簡化管理，以及具成本效益之 GbE 網管交換器擴充的需求。


產品特色

- 強化網路存取控管，支援 RADIUS、TACACS+、AAA、ACL 與 Port Security
- 協助保護接取網路，支援 DHCP Snooping、Dynamic ARP Inspection 與 IP Source Guard
- 簡化網路管理，支援 Web-based management、SNMP 與 RMON 監控
- 支援韌體升級、組態備份與診斷功能，提升維護效率
- 提供 Jumbo frame 與 20 Gbps switching capacity，支援高吞吐量資料傳輸
- 採用無風扇設計，適用於安靜且可靠的商規部署環境

產品規格

Interfaces ■ 8 x GbE RJ45 ports ■ 2 x GbE SFP uplinks ■ 1 x Reset button for system reboot and factory default restoration Standards ■ IEEE 802.3 10BASE-T ■ IEEE 802.3u 100BASE-TX ■ IEEE 802.3ab 1000BASE-T Ethernet ■ IEEE 802.3z 1000BASE-X ■ IEEE 802.3x Flow Control ■ IEEE 802.3az Energy Efficient Ethernet Network Resilience ■ Link Aggregation ■ LACP ■ STP/RSTP/MSTP ■ UDLD Protocols & Security ■ Jumbo frame support ■ VLAN, Voice VLAN, Protocol VLAN, MAC VLAN, Surveillance VLAN, and GVRP ■ IEEE 802.1ab Link Layer Discovery Protocol (LLDP) ■ IEEE 802.1p QoS and rate limiting ■ IGMP Snooping and MLD Snooping ■ RADIUS, TACACS+, and AAA authentication ■ MAC, IPv4, and IPv6 ACL ■ Storm Control ■ DoS protection ■ Dynamic ARP Inspection, DHCP Snooping, IP Source Guard ■ Port Security and protected port Mechanical ■ Dimension: 215(W) x 133(D) x 42(H) mm ■ Weight: 795 g ■ Installation: Rack mounting ■ Enclosure: Metal Case ■ Fanless design	Management ■ HTTP/HTTPS, Telnet/SSH ■ SNMP v1/v2c/v3, Syslog, RMON ■ SNTP ■ Firmware/configuration upgrade and backup via TFTP/HTTP ■ Ping, traceroute, Copper cable and SFP diagnostics Power ■ Internal power supply ■ Input: 90 to 264 VAC/47 to 63 Hz ■ Output: 12V/1A LED Indicators ■ PWR/SYS LED ■ RJ45 port link/activity LED ■ SFP port link/activity LED Environment & Regulatory Compliance ■ Operating temperature: -5°C to 50°C ■ Storage temperature: -40°C to 70°C ■ Operating humidity: 10% to 90% RH, non-condensing ■ Storage humidity: 5% to 90% RH, non-condensing ■ Safety: EN 62368-1 ■ EMI: AS/NZS CISPR 32, FCC 47 CFR Part 15 Subpart B, ICES-003 ■ EMC: EN 55032, EN 55035, EN 61000-3-2, EN 61000-3-3 ■ RoHS (Pb free) and REACH compliant ■ MTBF: > 25 years @25°C Standards and Certifications ■ CE&UKCA ■ FCC
---	---

產品尺寸

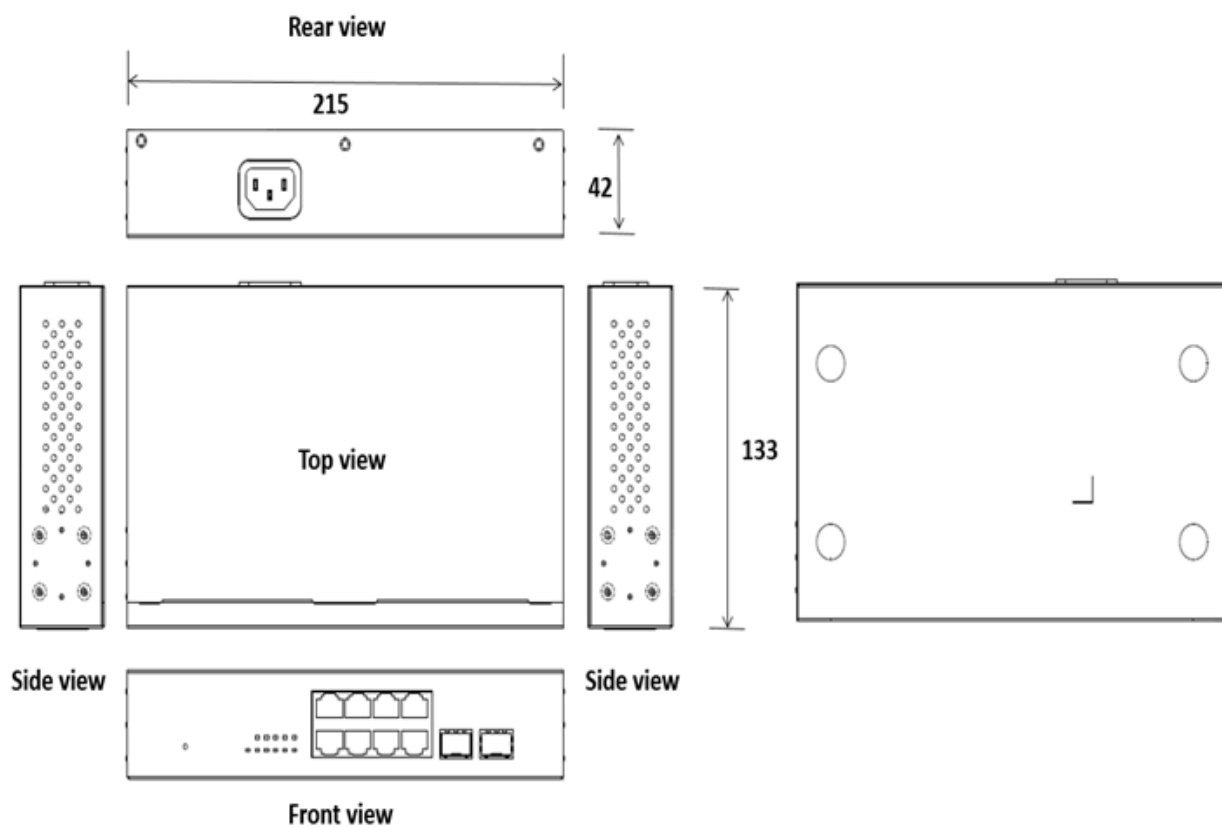

Unit: mm

訂購資訊

型號	說明
850G-10	10 埠 GbE 網管型交換器

註：產品功能與規格如有變更，恕不另行通知。