

850G-12PI

工業級 12 埠 GbE 網管型 PoE 交換器

產品介紹

昇頻工業級12埠GbE網管型PoE交換器850G-12PI擁有全速GbE乙太網路、遠端管理、網路復原、寬溫設計、DIN導軌、和光纖上行鏈路。提供8個PoE 10/100/1000Base-T連接埠，每埠PoE功率可高達30W，輕鬆連接至工控電腦、HMI、PLC、IP網路攝影機等。配置4個SFP插槽，可與SFP光纖收發器搭配使用，並支援數位診斷功能(DDM, Digital Diagnostic Monitoring)作為預測性維護，擴展構建環狀、菊鍊或樹狀拓撲的現代工業網路。



產品特色


- 全速 GbE 乙太網路支援所有的銅纜和光纖介面。
- 適合用於嚴峻環境的工業強固設計。
- 工作溫度-40°C 至 75°C。
- PoE 總功率預算 240W。
- 支援 ERPS。
- 支援 IPv6 管理。
- 支援 SFP 光纖收發器的數位診斷功能 (DDM)。
- 支援 Jumbo frames。
- DIN 導軌和壁掛式安裝選項。

產品規格

Interfaces ■ 8 x 10/100/1000BASE-T (RJ45) ■ 4 x 100FX/GbE SFP ■ 1 x RJ45 console port ■ 1 x Reset button ■ 1 x 5-pin Terminal Block for Power in ■ 1 x 3-pin Terminal Block for DO ■ 1 x 4-pin Terminal Block for DI Network Resilience ■ IEEE 802.1D STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP ■ LACP: Static trunk Protocols & Security ■ IEEE 802.1Q Port-based VLAN ■ IEEE 802.1ab Link Layer Discovery Protocol (LLDP) ■ IEEE 802.1p QoS, IGMP snooping, Port-based traffic shaping ■ IP and MAC-based access control ■ IEEE 802.1X authentication Network Access Control ■ Multicast, Broadcast, Flooding Storm Control ■ DoS, Dynamic ARP Inspection, DHCP Snooping, IP Source Guard Mechanical ■ Dimension (H x D x W): 134 x 124 x 73 mm ■ Weight: 1000g ■ DIN-rail and Wall mounted ■ Aluminum & Metal: IP40	Management ■ Web-based Management, HTTP/HTTPS, Console, CLI, Telnet, SSH ■ SNMP v1, v2c, v3, Syslog ■ HTTP/TFTP firmware upgrade ■ SNTp ■ PoE scheduling, power control Power ■ Input: 48V~57VDC ■ System power consumption: 13 W ■ PoE Power Budget: 240W LED Indicators ■ Power input, System Alarm ■ Ethernet LAN Port Link & Speed, SFP Port Link ■ PoE power output Environment & Regulatory Compliance ■ Operation temperature: -40 to +75°C ■ Storage temperature: -40 to +85 °C ■ Humidity (non-condensing): 10 to 95% RH ■ EMC Class A ■ Emission (EMI/EMS): CE/FCC class A, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8 ■ Safety: ETL EN62368 ■ Shock: IEC60068-2-27 ■ Freefall: IEC60068-2-32 ■ Vibration: IEC60068-2-6 ■ MTBF: > 25 years @25°C Standards and Certifications ■ CE&UKCA ■ FCC ■ BSMI CNS15936
--	---

產品尺寸

單位:mm

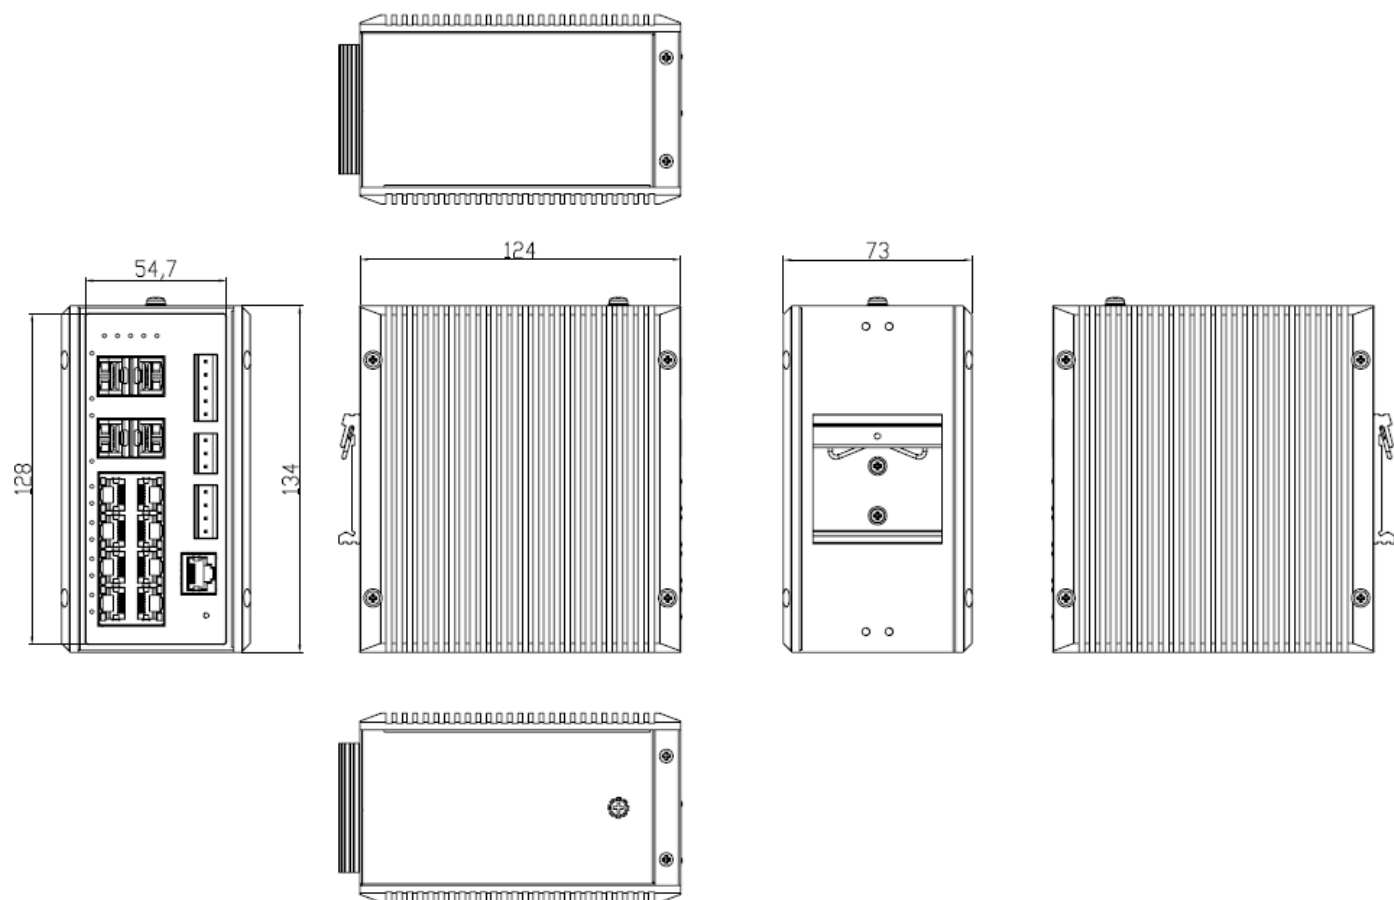

訂購資訊

型號	產品描述
850G-12PI	工業級 12 埠 GbE 網管型 PoE 交換器

註: 產品特色和規格如有更改, 恕不另行通知。