

850X-54P



54-Port GbE Managed PoE Switch with 6 10G SFP+ Uplinks

Introduction

Proscend 54-Port GbE Managed PoE Switch 850X-54P supports 48 RJ45 10/100/1000BASE-T ports with Power-over-Ethernet power source is IEEE 802.3at/af compliant and provides additional six 10G SFP+ ports for optical connections using multimode or single-mode SFP/SFP+ transceivers. The 850X-54P enables diversified combinations of network bandwidth and can handle extremely large amounts of data between network edge switches and core networks.

Features

- 10G SFP+ on all uplink fiber interfaces.
- Full Gigabit Ethernet on all copper interfaces.
- Non-blocking full wire-speed.
- Support IEEE 802.3at/af PoE
- Support Link Aggregation, up to 120Gbps uplink bandwidth in duplex mode.
- Support Spanning Tree Protocol STP/RSTP/MSTP.
- QoS CoS/DSCP to increase determinism.
- Support Storm control.
- Access Control List (ACL).
- Auto VLAN assignment.
- IPv6 manageable.
- Support Jumbo frames.
- 19" rack mountable.

Specifications

Interfaces

- 48 x LAN port: 100/1000BASE-T (RJ45)
- 6 x Uplink port: 10G SFP+ slot
- 1 x Reset Button
- 1 x Console port by RJ45 type
- 2 x AC socket
- 1 x Slide Switch

Network Resilience

- IEEE 802.1D STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
- LACP: Static trunk

Protocols & Security

- Port-based VLAN
- IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
- IEEE 802.1p QoS, IGMP, Port-based traffic shaping
- IP and MAC-based access control
- IEEE 802.1X authentication Network Access Control
- Multicast, Broadcast, Flooding Storm Control
- DoS, Dynamic ARP Inspection, DHCP Snooping, IP Source Guard

Mechanical

- Dimension (H x D x W): 45 x 330 x 441 mm
- Weight: 5880g
- 4 x Fan
- Rack mounting

Management

- Web-based Management, HTTP/HTTPS, Console, CLI, Telnet, SSH
- SNMP v1, v2c, v3, Syslog
- HTTP/TFTP firmware upgrade
- SNTP
- PoE scheduling, power control

Power

- Internal power supply
- Input: 100~240 VAC ,50/60Hz
- System power consumption: 54W
- PoE Power Budget:800W

LED Indicators

- Power input, System status, and Alarm
- Ethernet LAN port Link & Speed
- SFP+ port Link & Speed
- PoE power output


Environment & Regulatory Compliance

- Operation temperature: 0 to 50°C
- Storage temperature: -40 to 70°C
- Humidity (non-condensing): 10 to 90%
- EMC Class A
FCC CFR Title 47, Part 15, Subpart B, ICES-003 Issue 7, ANSI C63.4
CE EN55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, AS/NZS CISPR 32
- Electrical safety: EN62368-1
- RoHS (Pb free) and REACH compliant
- MTBF: > 25 years @25°C

Standards and Certifications

- CE&UKCA
- FCC

Dimensions

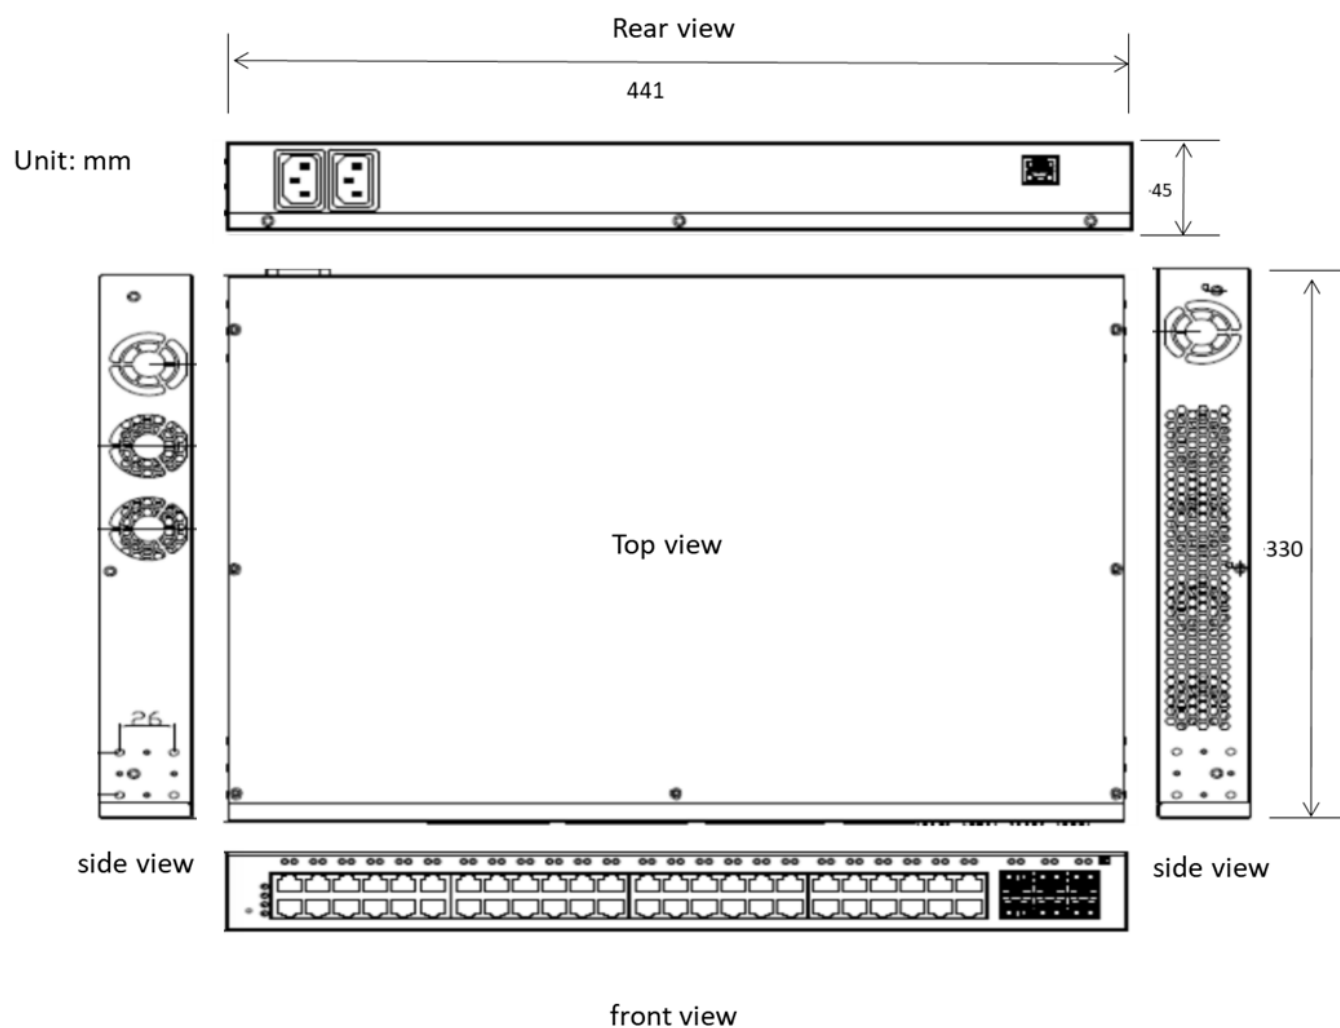

Ordering Information

Model Name	Description
850X-54P	54-Port GbE Managed PoE Switch with 6 10G SFP+ Uplinks

NOTE: Features and specifications are subject to change without prior notice.