

## 850XF-28DP



## 28-Port GbE Fiber Managed Switch with 4 10G SFP+ Uplinks, Dual Power

### Introduction

Proscend 28-Port GbE Fiber Managed Switch 850XF-28DP supports dual power, 24 GbE SFP ports and provides an additional four 10G SFP+ ports for optical connections using multimode or single-mode SFP/SFP+ transceivers. The 850XF-28DP enables diversified combinations of network bandwidth and can handle extremely large amounts of data between network edge switches and core networks.


### Features

- 10G SFP+ on all uplink fiber interfaces.
- Full Gigabit Ethernet on all SFP interfaces.
- Non-blocking full wire-speed.
- Support Dual Power for redundancy.
- Support Link Aggregation, up to 80Gbps uplink bandwidth in duplex mode.
- Support Spanning Tree Protocol STP/RSTP/MSTP.
- QoS CoS/DSCP to increase determinism.
- Support Storm control.
- Access Control List (ACL).
- Auto VLAN assignment.
- IPv6 manageable.
- Support Jumbo frames.
- 19" rack mountable.

## Specifications

<p><b>Interfaces</b></p> <ul style="list-style-type: none"> <li>■ 24 x LAN port: GbE SFP slot</li> <li>■ 4 x Uplink port: 10G SFP+ slot</li> <li>■ 1 x Reset Button</li> <li>■ 1 x Console port by RJ45 type</li> <li>■ 2 x AC socket</li> </ul> <p><b>Network Resilience</b></p> <ul style="list-style-type: none"> <li>■ IEEE 802.1D STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP</li> <li>■ LACP: Static trunk</li> </ul> <p><b>Protocols &amp; Security</b></p> <ul style="list-style-type: none"> <li>■ Port-based VLAN</li> <li>■ IEEE 802.1ab Link Layer Discovery Protocol (LLDP)</li> <li>■ IEEE 802.1p QoS, IGMP, Port-based traffic shaping</li> <li>■ IP and MAC-based access control</li> <li>■ IEEE 802.1X authentication Network Access Control</li> <li>■ Multicast, Broadcast, Flooding Storm Control</li> <li>■ DoS, Dynamic ARP Inspection, DHCP Snooping, IP Source Guard</li> </ul> <p><b>Mechanical</b></p> <ul style="list-style-type: none"> <li>■ Dimension (H x D x W): 44 x 270 x 441 mm</li> <li>■ Weight: 4150 g</li> <li>■ 3 x Fan</li> <li>■ Rack mounting</li> </ul>	<p><b>Management</b></p> <ul style="list-style-type: none"> <li>■ Web-based Management, HTTP/HTTPS, Console, CLI, Telnet, SSH</li> <li>■ SNMP v1, v2c, v3, Syslog</li> <li>■ HTTP/TFTP firmware upgrade</li> <li>■ SNTP</li> </ul> <p><b>Power</b></p> <ul style="list-style-type: none"> <li>■ Internal dual power supply</li> <li>■ Input: 100~240 VAC 50/60Hz</li> <li>■ System power consumption: 46W</li> </ul> <p><b>LED Indicators</b></p> <ul style="list-style-type: none"> <li>■ Power input, System status, and Alarm</li> <li>■ Ethernet LAN port Link &amp; Speed</li> <li>■ SFP+ port Link &amp; Speed</li> </ul> <p><b>Environment &amp; Regulatory Compliance</b></p> <ul style="list-style-type: none"> <li>■ Operation temperature: 0 to 50°C</li> <li>■ Storage temperature: -40 to 70°C</li> <li>■ Humidity (non-condensing): 10 to 90%</li> <li>■ EMC Class A FCC CFR Title 47, Part 15, Subpart B, ICES-003 Issue 7, ANSI C63.4 CE EN55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, AS/NZS CISPR 32</li> <li>■ Electrical safety: EN62368-1</li> <li>■ RoHS (Pb free) and REACH compliant</li> <li>■ MTBF: &gt; 25 years @25°C</li> </ul> <p><b>Standards and Certifications</b></p> <ul style="list-style-type: none"> <li>■ CE&amp;UKCA</li> <li>■ FCC</li> </ul>
---	--

## Dimensions

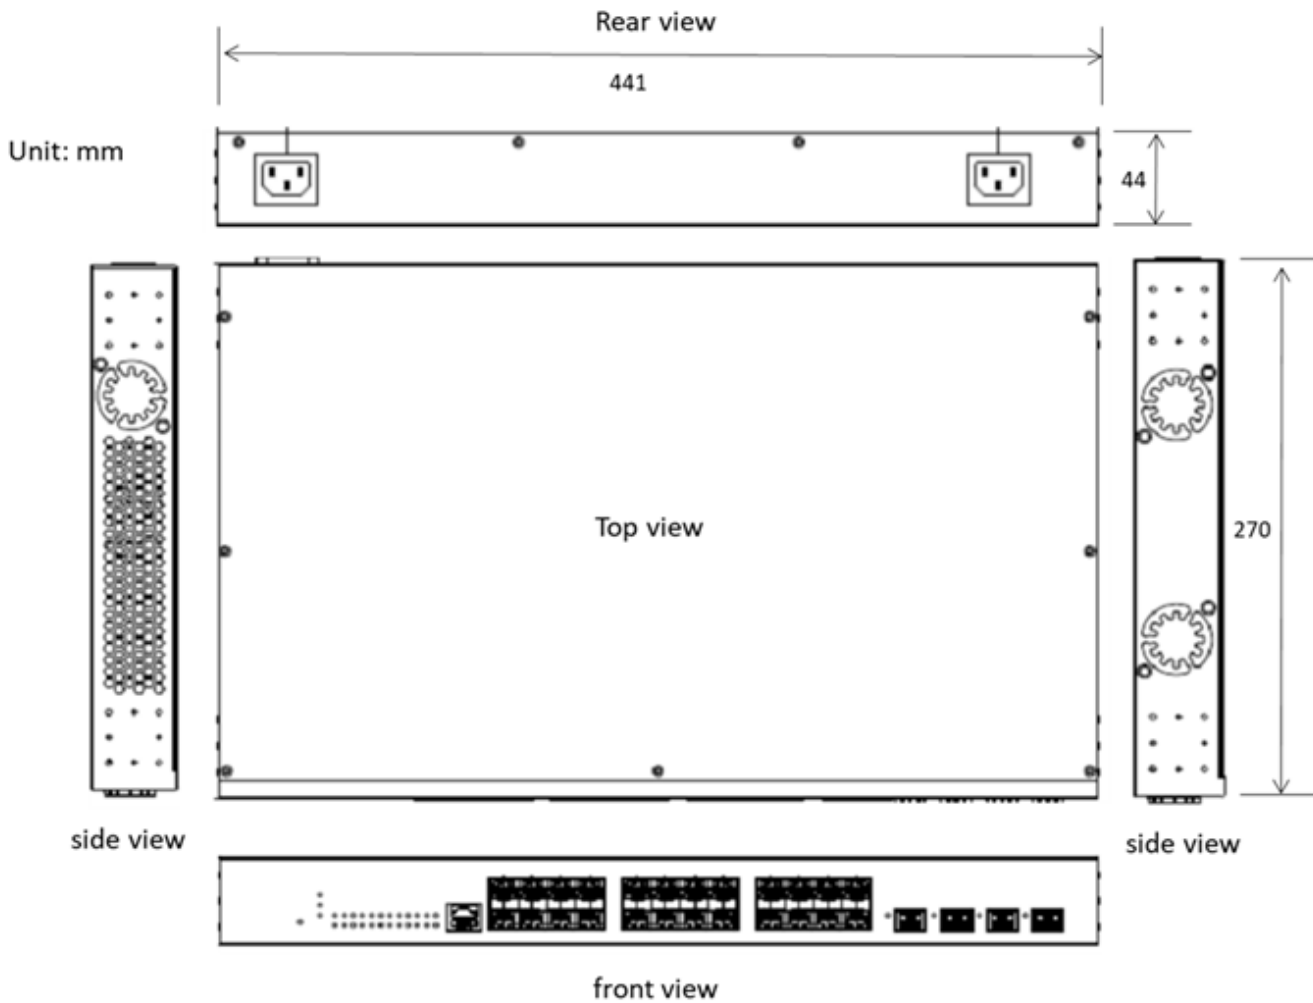

## Ordering Information

Model Name	Description
850XF-28DP	28-Port GbE Fiber Managed Switch with 4 10G SFP+ Uplinks, Dual Power

**NOTE:** Features and specifications are subject to change without prior notice.