

850XF-28DP

雙電源 28 埠光纖網管型交換器 含 4 個 10G SFP+上行介面



產品介紹

昇頻28埠光纖網管型交換器850XF-28支援24個GbE SFP連接埠，加上4個10G SFP+連接埠，可使用於多模或單模SFP/SFP+收發器的光纖連接，雙電源備援提供使用者更穩定的連線。850XF-28提供多樣化網路頻寬的組合，可以處理網路邊緣交換器和核心網絡之間的大規模數據量。


產品特色

- 上行光纖介面均採用 10G SFP+介面。
- 全 SFP 介面均採用 GbE 乙太網路。
- 無阻塞全線速。
- 支援 Link Aggregation，雙工模式下高達 80Gbps 的上行頻寬。
- 支援 Spanning Tree Protocol STP/RSTP/MSTP。
- QoS CoS/DSCP 提升精確決策。
- 支援 Storm control。
- Access Control List (ACL)。
- 自動 VLAN 分配。
- 可管理 IPv6。
- 支援 Jumbo frames。
- 19 英寸機架安裝。

產品規格

<p>Interfaces</p> <ul style="list-style-type: none"> ■ 24 x LAN port: GbE SFP slot ■ 4 x Uplink port: 10G SFP+ slot ■ 1 x Reset Button ■ 1 x Console port by RJ45 type ■ 1 x AC socket <p>Network Resilience</p> <ul style="list-style-type: none"> ■ IEEE 802.1D STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP ■ LACP: Static trunk <p>Protocols & Security</p> <ul style="list-style-type: none"> ■ Port-based VLAN ■ IEEE 802.1ab Link Layer Discovery Protocol (LLDP) ■ IEEE 802.1p QoS, IGMP, Port-based traffic shaping ■ IP and MAC-based access control ■ IEEE 802.1X authentication Network Access Control ■ Multicast, Broadcast, Flooding Storm Control ■ DoS, Dynamic ARP Inspection, DHCP Snooping, IP Source Guard <p>Mechanical</p> <ul style="list-style-type: none"> ■ Dimension (H x D x W): 44 x 270 x 441 mm ■ Weight: 3790 g ■ 3 x Fan ■ Rack mounting 	<p>Management</p> <ul style="list-style-type: none"> ■ Web-based Management, HTTP/HTTPS, Console, CLI, Telnet, SSH ■ SNMP v1, v2c, v3, Syslog ■ HTTP/TFTP firmware upgrade ■ SNTF <p>Power</p> <ul style="list-style-type: none"> ■ Internal dual power supply ■ Input: 100~240 VAC 50/60Hz ■ System power consumption: 46W <p>LED Indicators</p> <ul style="list-style-type: none"> ■ Power input, System status, and Alarm ■ Ethernet LAN port Link & Speed ■ SFP+ port Link & Speed <p>Environment & Regulatory Compliance</p> <ul style="list-style-type: none"> ■ Operation temperature: 0 to 50°C ■ Storage temperature: -40 to 70°C ■ Humidity (non-condensing): 10 to 90% ■ EMC Class A FCC CFR Title 47, Part 15, Subpart B, ICES-003 Issue 7, ANSI C63.4 CE EN55032, EN55035, EN IEC 61000-3-2, EN 61000-3-3, AS/NZS CISPR 32 ■ Electrical safety: EN62368-1 ■ RoHS (Pb free) and REACH compliant ■ MTBF: > 25 years @25°C <p>Standards and Certifications</p> <ul style="list-style-type: none"> ■ CE&UKCA ■ FCC
---	--

產品尺寸

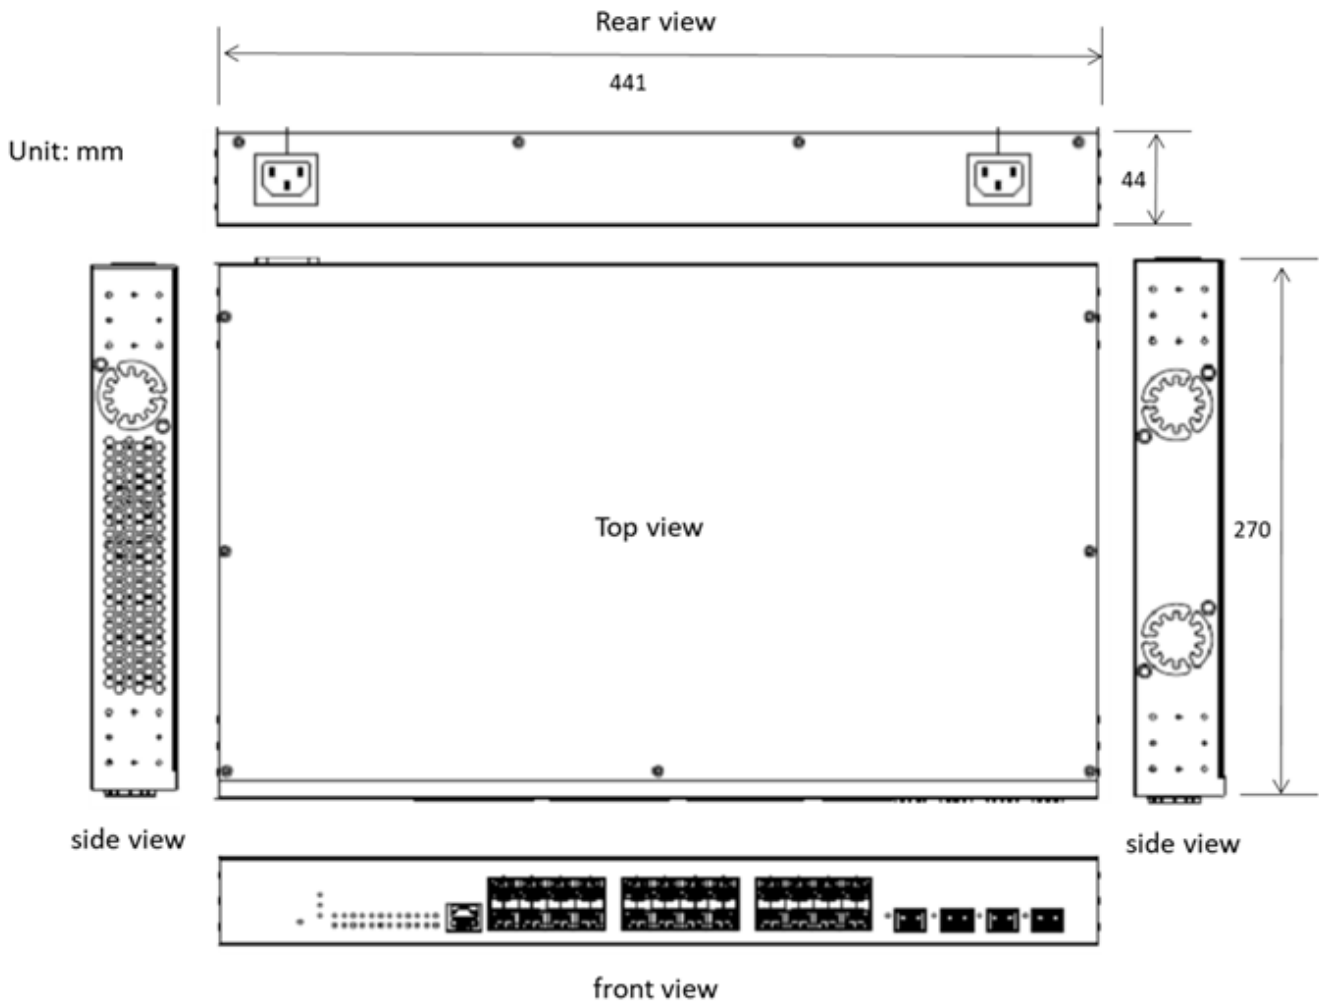

訂購資訊

型號	產品描述
850XF-28DP	雙電源 28 埠光纖網管型交換器含 4 個 10G SFP+ 上行介面

註: 產品特色和規格如有更改, 恕不另行通知。