

M352-5G

IIoT 5G NR 微型行動路由器



產品介紹

昇頻M352-5G IIoT 5G NR微型行動路由器是一款極精巧的工業級5G NR用戶終端設備，藉由5G NR高速、低延遲特性，實現高效穩定與安全可靠的智慧連結，賦能各式各樣的萬物聯網產業及垂直應用更加蓬勃發展。

昇頻M352-5G具備5G NR蜂巢式行動通訊技術，展現更快速的無線傳輸效率及更低的延遲性，非常適合用於承載8K超高清視訊串流至網路的解決方案。微型輕量尺寸、更低功耗、更寬溫的設計，內建2個GbE乙太網路連接埠和DI/DO介面，易於安裝布建在狹小有限的機櫃空間中，並適應各種嚴苛的環境場域，創造最大化的絕佳效能。

因應多樣化的物聯網情境需求，昇頻M352-5G路由器可透過昇頻IoT物聯網管理系統O'smart，幫助管理者隨時隨地即時遠端監控、快速診斷設備狀態和智能化更新設定，大幅提升營運績效。


產品特色

- 微型精巧尺寸 103 x 25 x 93 mm (寬 x 高 x 深)。
- 支援多頻段 5G NR / FDD LTE / TDD LTE。
- 內建 2 個 GbE 乙太網路連接埠、Micro SIM 卡槽和 DI/DO 連接介面。
- 可拆卸天線設計，用於連接不同的外接式天線。
- 工規溫度範圍為-40 至+70°C，適用於嚴峻環境。
- 搭配 IoT 物聯網管理平台 O'smart，即時遠端智慧監控。

產品規格

Cellular Interface ■ 5G: NR FDD/TDD ■ 4G: LTE FDD/TDD ■ 3G: WCDMA Hardware interface ■ 1 x LAN/WAN 1000Base-T sharing port compliant with 802.3ab ■ 1 x LAN 1000Base-T ports compliant with 802.3ab ■ 1 x Micro SIM slot ■ 1 x Reset Button ■ 1 x RS-485 (D+/D-/GND, Non-Isolated) ■ 1 x DI (Non-Isolated), 1 x DO (Non-Isolated) ■ 2x SMA connectors for 5G Antenna Physical Characteristics ■ Enclosure : Metal Case ■ Dimensions (W x H x D) : 103 x 25 x 93 mm ■ Weight : 335 g ■ Installation : Wall mounting, DIN-rail mounting, Desktop. LED Display ■ 1 x Power status ■ 1 x SIM card presence ■ 1 x Cellular signal strength Power Supply ■ Terminal block power Input: 10~26VDC ■ DC Jack Power Input: 12 VDC, 2A ■ Power Consumption: 18 watts (Max)	Environment ■ Operating Temperature -40 ~ +70°C ■ Storage Temperature -40 ~ +85°C ■ Ambient Relative Humidity 10 ~ 95% (non-condensing) ■ Humidity 0 ~ 95% (non-condensing) Software ■ Network Protocols: IPv4, IPv6, IPv4/IPv6 dual stack, DHCP server and client, Static Routing, Policy Route, Static IP, SNTP, DNS Proxy, Modbus TCP to Modbus RTU, DDNS, QoS, UPnP ■ Routing/Firewall: NAT, Virtual Server, DMZ, MAC Filter, URL Filter, IP Filter, IPS ■ VPN: IPSec (3DES, AES128, AES192, AES256, MD5, SHA-1, SHA256), GRE, PPTP, L2TP ■ Management: Web GUI with HTTPS/HTTP, Dual Image, Syslog, SNMP, SSH v2, SMS Action, O'smart ■ Cellular: Dual APN, IP Passthrough ■ Alarm: SMS, VPN/WAN Disconnect, SNMP Trap, E-mail Standards and Certifications ■ NCC & BSMI CNS15936 & CNS15598-1
--	---

產品尺寸

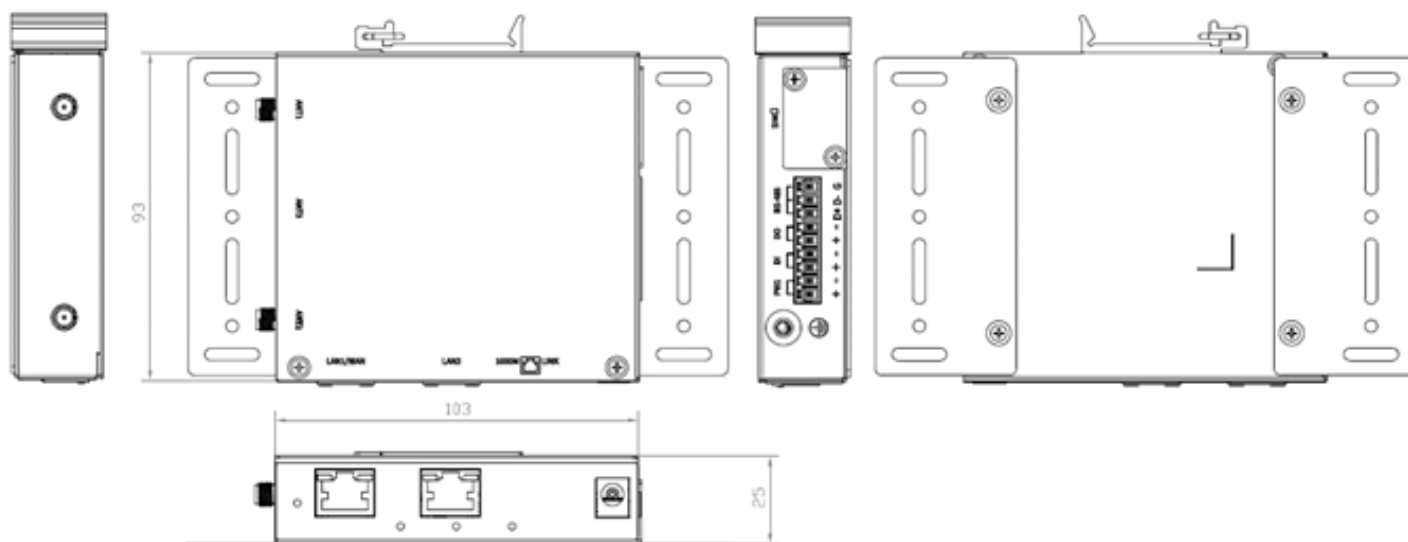

訂購資訊

型號	產品描述
M352-5G	IIoT 5G NR 微型行動路由器

註: 產品特色和規格如有更改, 恕不另行通知。